




WCL 0411T WARNING LIGHT CYLINDRICAL SMALL SIZE TELESCOPIC

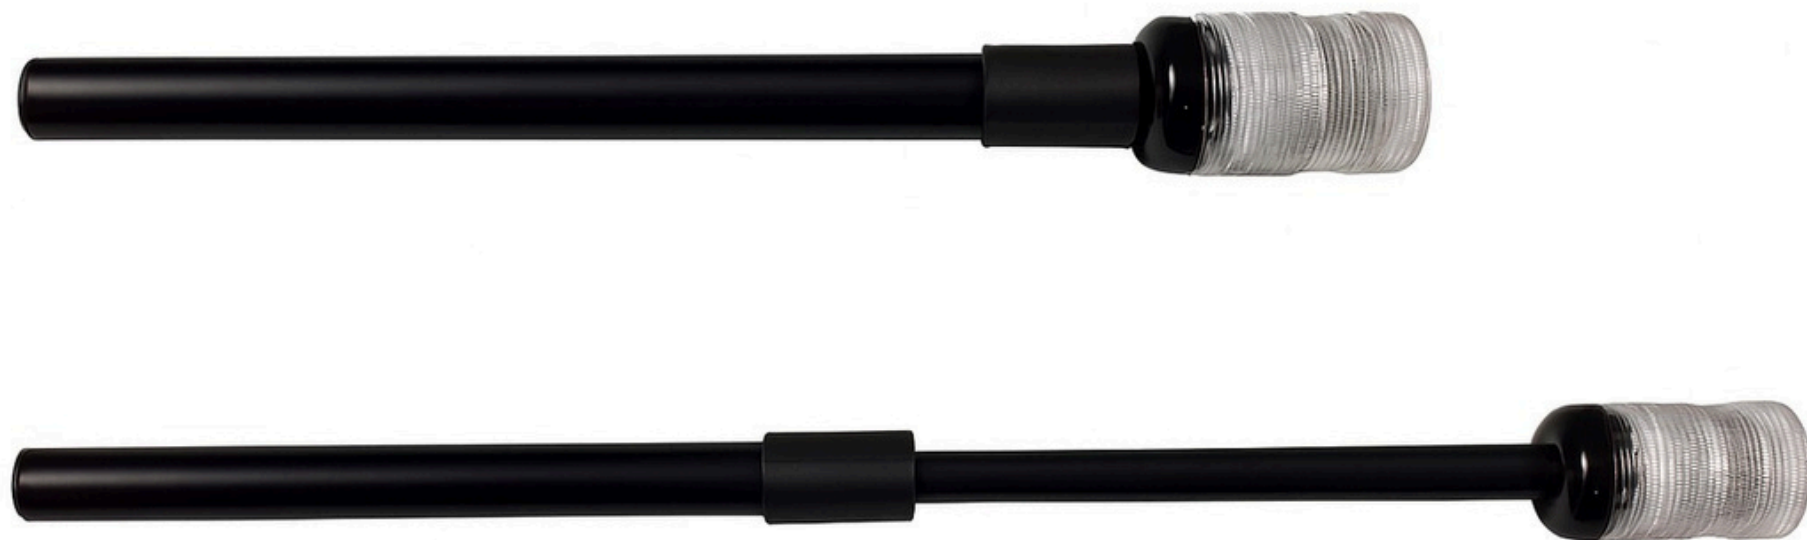

TECHNICAL SPECIFICATIONS

Operating Voltage	10VDC - 30VDC
Nominal Voltage	12VDC / 24VDC
Current Consumption	0- 1A
Dome Color	
LED Color	
Lens Color	Specially designed Fresnel lens providing 360° visibility
Flash Frequency	1 - 20Hz.
Number of Flash Patterns	Multiple flash modes capable of synchronized operation with ZER products
Synchronization	Synchronization feature compatible with ZER products
Special Features	UV resistance, 360° visibility, high brightness, optional roof mounting with N35 neodymium magnet
Interface	Control with specially set switch
Cable Length	100mm
Mounting Type	Attaching to motorcycle body with internal screw and optional mounting bracket
Length	103mm
Width	75mm
Height	Adjustable Height: Min: 50 cm, Max: 76 cm
Weight	650gr
Protection Rating	IP65
Approvals / Certifications	ECE R10, ECE R65, IP65
LED Lifetime	50,000 hours
Operating Temperature	-40°C ~ 65°C
Warranty Period	2 years
Applications	Police, Gendarmerie, Ambulance, Fire Brigade, Airport, Municipality, Highways, Private Service, Official Vehicles, Tow Trucks

ADVANTAGES

- UV radiation and environmental condition-resistant polycarbonate outer housing.
- Specially designed Fresnel lens delivering exceptional 360° brightness and visibility with high-power LEDs.
- Multiple flash patterns capable of operating synchronously with ZER products.
- Battery protection through low current consumption.
- Optional mounting bracket allowing attachment to motorcycle body and permanent internal screw mounting.
- Compatibility with various vehicle structures thanks to adjustable height.
- Wide range of color options: Blue, Red, Amber, Green, White.
- Compliant with ECE R10 and ECE R65 standards.
- Long LED lifespan of 50,000 hours.
- Covered by a 2-year warranty.
- Lightweight and compact design

